MCS Sanitation

SUPER GLOSS TWO MCS 324

Floor Finish Brix 27%

Fini à Plancher Brix 27%

PRODUCT DESCRIPTION : Provides axcellent gloss off the mop, superior durability, dries quickly and it responds quickly to burnishing. Its ease of application is well suited for low, periodic and high maintenance schedules and ensures trouble-free applications. It has excellent resistance to humidity, detergents, scuff, black heel mark and overall wear resistance and provides superior protection and brilliance to your floors.

DESCRIPTION DU PRODUIT : Offre un fini lustré et une durabilité supérieure; il sèche rapidement et réagit rapidement au polissage. Sa facilité d'application convient parfaitement aux entretiens réguliers de même qu'à ceux moins fréquents et garantit une application sans problème. Ce produit est très résistant à l'humidité, aux détergents, aux égratignures, aux marques noires de souliers ainsi qu'à l'usure en général en plus d'offrir une protection supérieure et un fini lustré à vos planchers.

MCS SANITATION EST. 1991

Super Gloss Two

Floor Finish 27% Brix

Fini à Planchers 27% Brix

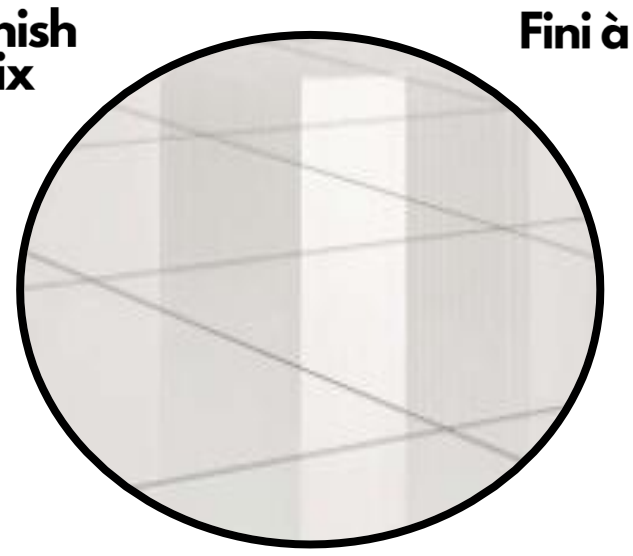

CODE 1Lt	N/A
CODE 4Lt	N/A
CODE 20Lt	SGTWO20
CODE 205Lt	N/A

DIRECTION: 1) Remove old finish from the floor using a Floor Stripper. 2) Rinse, neutralize and allow floor to dry thoroughly. 3) Seal floor if desired using a sealer. 4) Apply 2-6 coats of **SUPER GLOSS TWO.** 5) Allow 20-40 minutes drying time between each coats. 6) Finish can be maintained by daily washing with a neitral cleaner and periodical spray buffing or burnishing.

DAILY CLEANING – LOW MAINTENANCE: 1) Dust mop the floor to remove dirt and grit. 2) Use a neutral cleaner with mop or auto-scrubber to remove soil. 3) When required use a burnisher (1000-3000 rpm), polish the floor to build shine, remove scratches and scuff marks.

PERIODIC MAINTEANCE: 1) Dust mop the floor to remove dirt and grit. 2) Use a neutral cleaner with mop or auto-scrubber to remove soil. 3) On a weekly basis, using a burnishern (1000-3000 rpm), polish the floor to build shine, remove scratches and scuff marks. 4) In high traffic areas, apply a coat of **SUPER GLOSS TWO** or spray burnish using a restorer.

HIGH MAINTENANCE: 1) Dust mop the floor to remove dirt and grit. 2) Use a neutral cleaner with mop or auto-scrubber to remove soils. 3) Using a high speed burnisher (1000-3000 rpm), polish the floor to build shine, remove scratches, scuff marks and to polish the surface 3-6 times/week. 4) In high traffic areas, apply a coat of **SUPER GLOSS TWO** or spray burnish using a restorer.

SCRUB AND RE-COAT: 1) Dust mop the floor to remove dirt and grit. 2) Dilute a deep scrub cleaner in a mop bucket using a low speed floor machine or auto-scrubbing machine. 3) Apply solution to floor. 4) Using a blue pad scrub floor to remove the top layers of soiled finish. 5) Pick-up dirty solution with mop or vacuum. 6) Rinse thoroughly and let dry completely before recoating. 7) When the floor is dry, apply 2-3 coats of **SUPER GLOSS TWO**. 8) Allow 20-40 minutes of drying time between coats. 9) Allow 24 hours to cure. 10) Burnish (1000-3000rpm) for a ''Wet Look'' shine.

PRECAUTIONS FOR FOOD PLANTS: Must be applied in keeping with manufacturers recommendations for application on hard smooth level surfaces. To avert possible adverse organoleptic effects in food, which are processed in the area, adequate precautions should be taken to ensure that the volatile constituents of the applied proucts do not contaminate the foods. Follow all Federal, Provincial and local regulations regarding waste disposal.

MODE D'EMPLPOI: 1) Enlever le vieux fini du plancher en utilisant un décapant. 2) Rincer, neutraliser et laisser sécher complètement. 3) Sceller le plancher si désiré en utilisant un scellant. 4) Appliquer de 2-6 couches de **SUPER GLOSS TWO**. 5) Laisser sécher de 20-40 minutes entre chaque couche. 6) Le fini peut être entretenu par un lavage quotidien avec un nettoyant neutre et par un polissage périodique par vaporisation ou à ultra haute vitesse.

ENTRETIEN QUOTIDIEN LÉGER: 1) Balayer pour enlever la saleté et les débris. 2) À l'aide d'une vadrouille ou d'une autorécureuse, enlever la saleté en utilisant un nettoyant neutre. 3) Lorsque nécessaire, utiliser une polisseuse (1000-300 tr/min) pour polir le plancher afin d'en raviver le lustre, enlever les égratignures et les marques de talons.

ENTRETIEN PÉRIODIQUE: 1) Balayer pour enlever la saleté et les débris. 2) À l'aide d'une vadrouille ou d'une autorécureuse, enlever la saleté en utilisant un nettoyant neutre. 3) Hebdomadairement, utiliser une polisseuse (1000-3000 tr/min) pour polir le plancher afin d'en raviver le lustre, enlever les égratignures et les marques de talons. 4) Dans les endroits très achalandés, appliquer une couche de **SUPER GLOSS TWO** ou vaporiser et polir en utilisant un raviveur de lustre.

ENTRETIEN HAUT RENDEMENT: 1) Balayer pour enlever la saleté et les débris. 2) Enlever la saleté en utilisant un nettoyant neutre. 3) Utiliser une polisseuse de 3 à 6 fois par semaine (1000-3000 tr/min) pour polir le plancher afin d'en raviver le lustre, enlever les égratignures et les marques de talons. 4) Dans les endroits très achalandés, appliquer une couche de **SUPER GLOSS TWO**

RÉCURAGE ET NOUVELLE COUCHE: 1) Balayer pour enlever la saleté et les débris. 2) Diluer un nettoyant à heut rendement dans un seau à vadrouille et utiliser avec une récureuse à plancher à basse vitesse ou avec une autorécureuse. 3) Appliquer la solution sur le plancher. 4) Utiliser un tampon bleu pour enlever les premières couches de fini usé. 5) Ramasser la solution avec une vadroulle ou un aspirateur. 6) Rincer à fond et laisser sécher avant de recouvrir. 7) Lorsque le plancher est sec, appliquer 2 à 3 couches de fini à planchers **SUPER GLOSS TWO**. 8) Laisser sécher de 20-40 minutes entre chaque couche. 9) Attendre 24 heures avant de polir. 10) Polir (1000-3000 tr/min) pour un lustre d'aspect mouillé.

PRÉCAUTIONS POUR ÉTABLISSEMENTS ALIMENTAIRES: À appliquer conformément aux recommandations du fabricant sur une surface plane, dure et lisse. Pour éviter la possibilité d'effets organoleptiques négatifs dans les aliments préparés dans l'aire en question, il faut prendre des précautions suffisantes pour s'assurer que les constituants volatiles des produits appliqués ne contaminent pas les aliments. Respecter toutes les réglementations fédérales, provinciales et locales en vigueur en matièere d'élimination des déchets.

www.MCS.ca 1-800-396-7867